


Standard Power Conditioner Specifications

North American - ABC065-ABC201

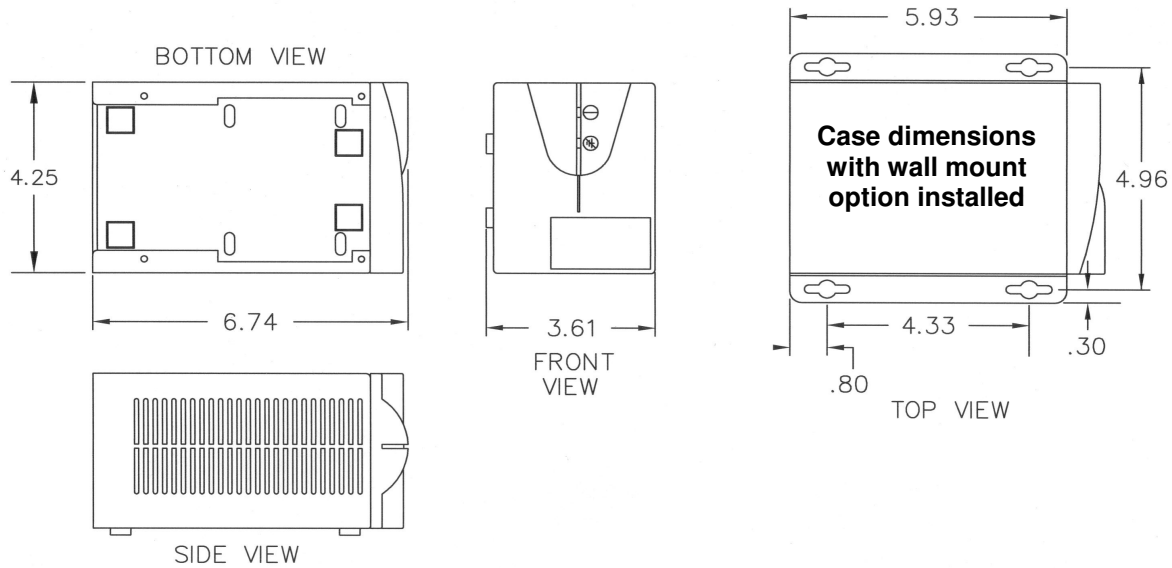

	ABC065-11 Part # 61008-XXR	ABC100-11 Part # 61012-XXR	ABC150-11 Part #61018-XXR	ABC201-11 Part # 61024-XXR
VA Rating	78	120	180	240
Frequency	60 Hz.	60 Hz.	60 Hz.	60 Hz.
BTU/Hr. Output	27	41	61	82
T.H.D. % Added	<1%	<1%	<1%	<1%
Load Surge Current @				
1/2 cycle	10 amps	15 amps	28 amps	38 amps
1 second	3.6 amps	5.2 amps	10 amps	14 amps
10 seconds	2.0 amps	3.0 amps	4.5 amps	6.0 amps
Input Voltage	120	120	120	120
Output Voltage	120	120	120	120
Output Current	.65 amps	1.0 amps	1.5 amps	2.0 amps
Efficiency	90%	90%	90%	90%
Voltage Drop No Load to Full Load	10%	10%	10%	9%
Wall mountable*	Yes	Yes	Yes	Yes
Compliance	UL, cUL, RoHS	UL, cUL, RoHS	UL, cUL, RoHS	UL, cUL, RoHS
Shipping Weight (lbs.)	5	6	6	7

* When ordering by model number, add "W" to model number above for wall mount option.

NOISE REJECTION-ISOLATION: With unit under power and an ANSI/IEEE C62.41Cat. A pulse applied either normal or common mode at the input, the noise output voltage will be less than 10V normal mode and less than 0.5V common mode in all four quadrants (CM-NM, NM-NM, CM-CM, NM-CM).

SURGE VOLTAGE WITHSTAND CAPABILITY: Tested under power to ANSI/IEEE C62.41 Cat. A & B (formerly IEEE587-1980). Cat. A - 6000V @ 200 amps, 0.5 usec risetime, 100 kHz decay, Cat. B - 6000V @ 500 amps, 0.5 usec risetime, 100 kHz decay.

Available Plug/Receptacle Options

POWERVAR Part

ABC065-11 - 61008-XXR**

ABC100-11 - 61012-XXR**


ABC150-11 - 61018-XXR**

ABC201-11 - 61024-XXR**

When ordering, add two digit number from below in place of **XX to specify receptacle option desired.


Option 1 - Standard Plugs/Receptacles

- 01 - 5-15P plug and one 5-15R duplex
- 21 - 5-15P plug and one 5-15R duplex with wallmount




Option 2 - Hospital Grade Plugs/Receptacle

- 11 - 5-15P plug and one 5-15R duplex hospital grade
- 31 - 5-15P plug and one 5-15R duplex hospital grade with wallmount



Option 3 - Twistlock Plugs/Receptacles

- 41 - L5-15P plug and one L5-15R duplex



Warranty/Support: POWERVAR warrants its power conditioners to be free from defects in materials and workmanship for a period of five years from the date of shipment. For North American service or support on any POWERVAR product, please contact POWERVAR Technical Support at (800) 369-7179 (in Illinois call (847-596-7000)). For service and support in EMEA, contact POWERVAR, Ltd. in the United Kingdom at +44 (0) 1793 553980. Or visit the POWERVAR website at www.powervar.com.